


ENERGY DISSIPATOR

EXISTING GRADE

CONTRACT NO. 98950 SECTION COUNTY TOTAL SHEET NO. WILLIAMSON 917 826 STA. TO STA. FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT

* I-57, & OLD IL 13 (FAU 9629) * * (X1-6-2)VB-2,(X1-6)HBK-2



EARTHWORK WILL BE CONSIDERED INCLUDED IN THE COST OF THE RIPRAP.

ENERGY DISSIPATOR IS TO BE CONSTRUCTED AT THE LOCATION INDICATED ON THE PLAN SHEETS.

RIPRAP FOR ENERGY DISSIPATOR

FOR ENERGY DISSIPATOR SHALL BE CONSTRUCTED IN PANCE WITH SECTION 281 OF THE STANDARD SPECIFICATIONS VISED HEREIN.

THE LENGTH, WIDTH AND DEPTH FOR RIPRAP PLACEMENT SHALL BE AS SPECIFIED IN THESE DETAILS, UNLESS OTHERWISE INDICATED IN THE PLANS.

THE RIPRAP FOR THE ENERGY DISSIPATOR SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SOLARE YARD FOR STONE DUMPED RIPRAP, CLASS A4

FILTER FABRIC AND BEDDING MATERIAL AS SPEC 281 OF THE STANDARD SPECIFICATIONS WILL NO

SECTION A-A

24" MINIMUM

23


D= INSIDE DIAMETER OF PIPE CULVERT OR CLEAR HEIGHT OF BOX CULVERT

PLAN

3:1

NOT NEEDED

DETAIL STONE RIPRAP DITCH (ON EXISTING PAVED DITCH)

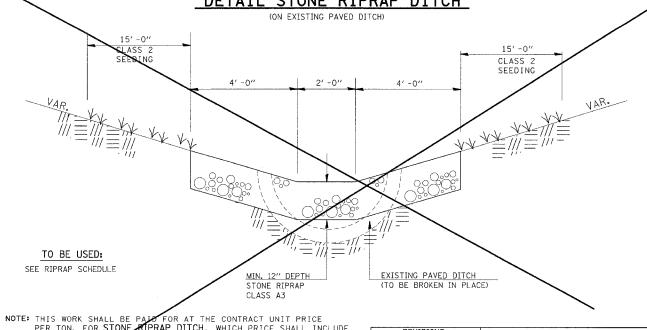

NOTE: THIS WORK SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE PER TON, FOR STONE RIPRAP DITCH, WHICH PRICE SHALL INCLUDE ALL MATERIAL LABOR AND EQUIPMENT TO COMPLETE THE WORK IN PLACE AS SI

THE FINISHED SIDESLOPES OF THE STONE RIPRAP DITCH SHALL HE EXISTING GRADE.


ILLINOIS DEPARTMENT OF TRANSPORTATION **DETAILS:**

PERIMETER EROSION BARRIER; STONE RIPRAP DITCH LINING; ENERGY DISSIPATOR: STONE RIPRAP DITCH

SCALE: VERT. NONE

DRAWN BY CNH CHECKED BY

TYPICAL DETAIL OF STONE RIPRAP DITCH LINING

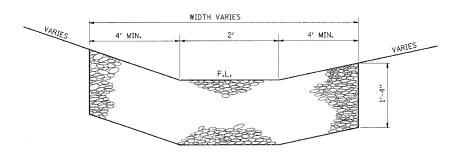

<u>NOTES</u>

THIS WORK INCLUDES THE EARTH EXCAVATION REQUIRED TO PLACE THE RIPRAP AS SHOWN. THE MATERIAL RESULTING FROM THE EARTH EXCAVATION SHALL BE PLACED IN THE ROADWAY EMBANKMENT, OR WASTED AS DIRECTED BY THE ENGINEER. THE EARTHWORK SHALL BE CONSIDERED INCLUDED IN THE COST OF

THE RIPRAP DITCH SHALL BE CONSTRUCTED AT THE LOCATIONS SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER. CONSTRUCTION OF THE STONE RIPRAP DITCH SHALL CONFORM TO THE REQUIREMENTS FOR CLASS A4 RIPRAP AS INDICATED IN SECTION 281 OF STANDARD SPECIFICATIONS.

THIS WORK SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE PER TON FOR **STONE RIPRAP, CLASS A4,** WHICH PRICE SHALL INCLUDE ALL MATERIAL, LABOR AND EQUIPMENT TO COMPLETE THE WORK IN PLACE AS SHOWN.

BEDDING MATERIAL AND FILTER FABRIC AS SPECIFIED IN SECTION 281 OF THE STANDARD SPECIFICATIONS WILL NOT BE REQUIRED.

THE WIDTH OF THE RIPRAP DITCH WILL BE AS SPECIFIED IN THE RIPRAP SCHEDULE OR AS DIRECTED BY THE ENGINEER.